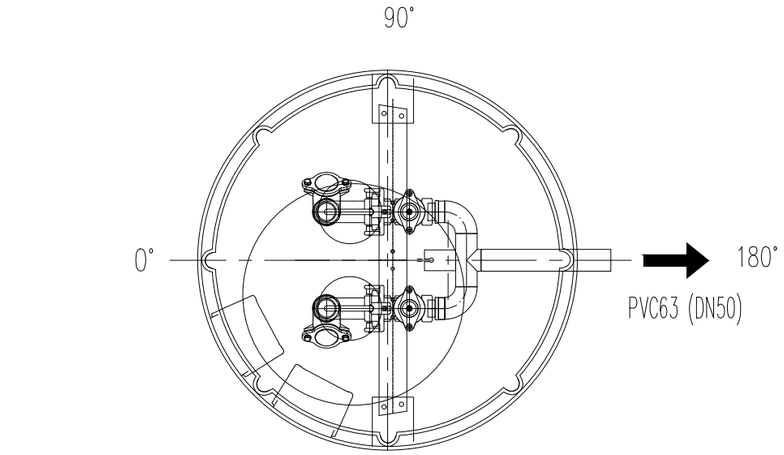

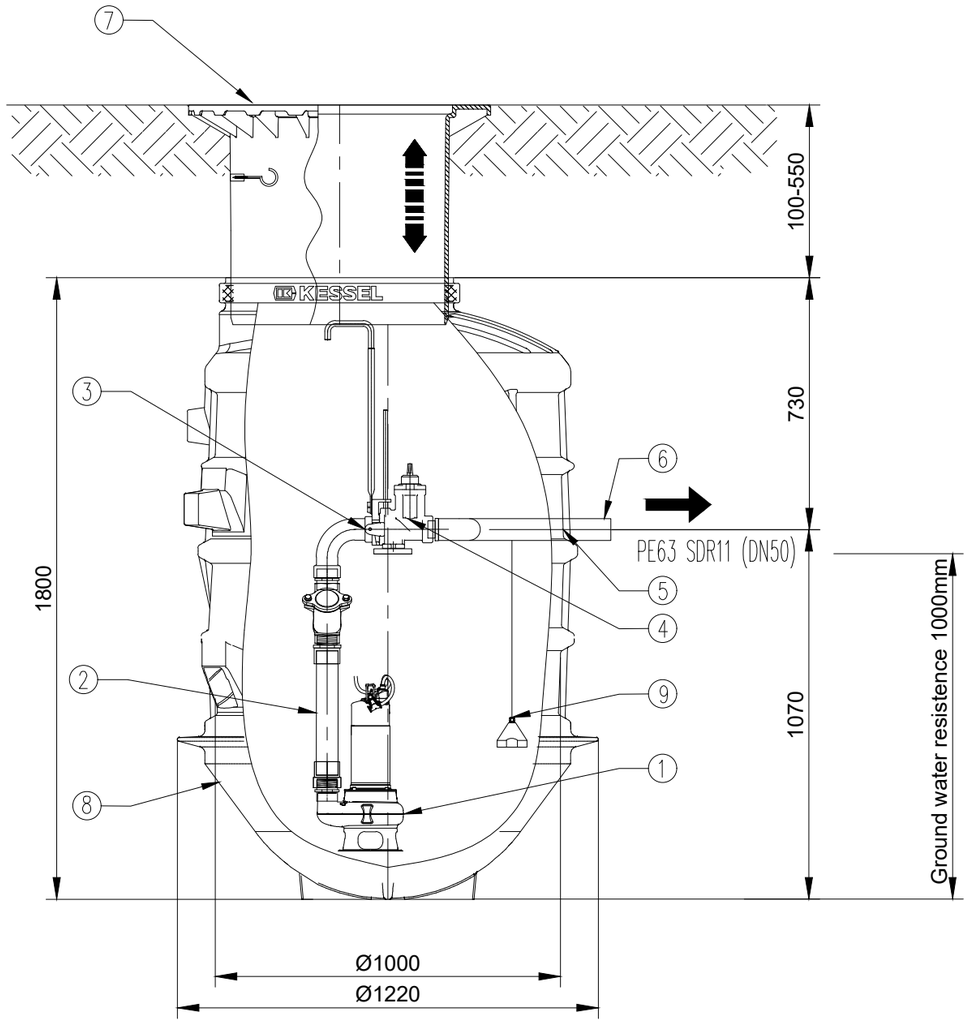



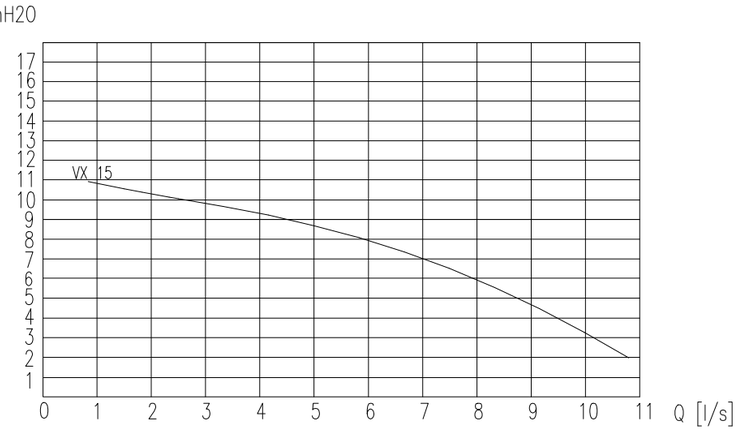

	Pump VX 15
Voltage	230V AC
Nominal current	7,0 A
Power	P1/P2 = 1,55/1,10 kW
Frequenzy	2900 rpm
Operating mode	S1
Medium temp.	max 40° C

gasket DN90 (ø100) for inlet attached to the product inlet is not prefabiricated

2 x gasket DN100 (ø110) for cable & ventilation attached to the product, not prefabiricated

double PE ø63 screw connector attached to the product

Lp.	Nazwa wyrobu	Ilość	Materiał
10.	Control unit Aqualift Comfort Duo 230V	1	...
9.	Pressure sensor with 10m preassure cable	1	...
8.	LW1000 tank	1	PE-LLD
7.	Upper section with level adjustment + plastic cover up to 600 kg	1	...
6.	Barefoot end PE HD ø63	1	PE HD SDR11
5.	Pressure outlet DN50	1	PE63
4.	Cut off valve DN50	2	stainles steel 1.4301
3.	Hook coupling integrated with back water valve DN50	2	cast iron
2.	pressure pipe DN50	2	PVC-U 63
1.	Pump VX15, 230V with 10m cabel	2	cast iron

KESSEL

Dla spawów:
*t = najmniejsza grubosc scianki
Δa = 0,7 x t*

DIN ISO 2768 mk
DIN ISO 13920-B
DIN 1910-3

Kessel Sp. z o.o.
ul. Innowacyjna 2
Biskupice Podgorne
55-040 Kobierzyce

Obiekt: Project: –

Firma: Company: –

Projekt-Nr.: Project.Nr.: 878721

Z.-Nr. Drawing: PO-0006.2VX15

Zawartosc: Contents: Pumping station Aquapump XL Basic Duo

	Datum	Name
bearb.	26.03.2026	P.GAJEWSKI
gepr.		

Wszelkie prawa zastrzeżone przez KESSEL Sp. z o.o. Kopiowanie i udostępnianie osobom trzecim bez zgody KESSEL zabronione.
Naruszenie praw autorskich może spowodować roszczenia o odszkodowanie.
Z zastrzeżeniem zmian technicznych.

Copyright by KESSEL Sp. z o.o. Any transmission, improper use or forwarding of this document is forbidden unless permission has been specifically granted by KESSEL.
Noncompliance or violation may result in a claim for damages.
Subject to technical modifications.